



ASSEMBLY

To attach the side shields, find the corresponding side shield for the temple arm (side shields are labeled L and R for left and right) and insert the hook into the temple and push up until you hear the side shield click into place

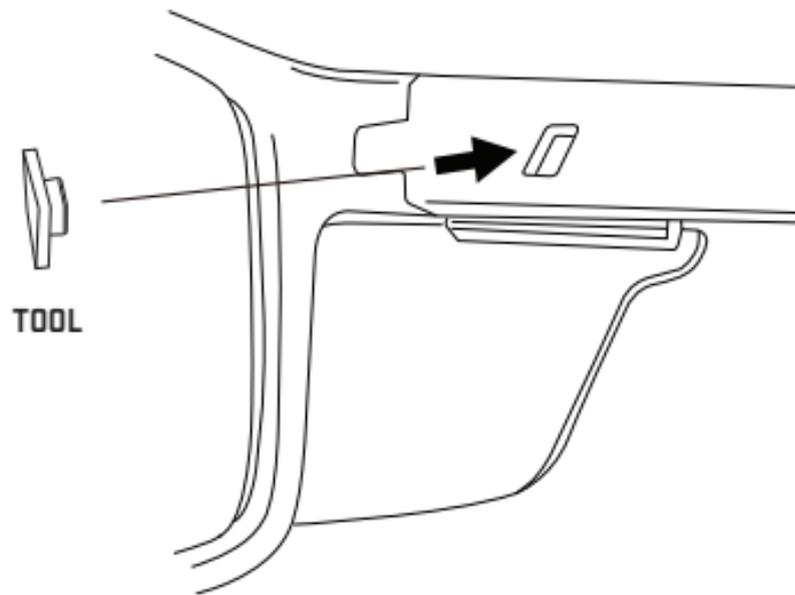

REMOVAL

To remove it, use the included tool and insert it into the temple and pull down on the side shield to separate it from the frame. Note: The tools are labeled L and R for left and right.

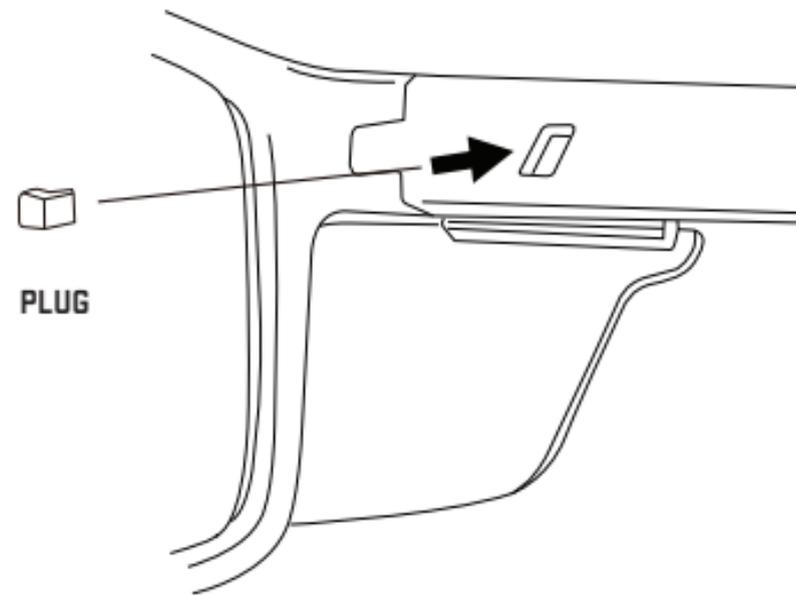

PERMANENT PLUG INSERTION

To make the side shields permanently affixed to the frame, the plug needs to be inserted into the hole on the inside of the temple by the hinge. After attaching the side shields, firmly push the plug into the hole until it is flush with the temple. The side shield will not be removable after this is done.

MAINTENANCE: Wiley X lenses are specially coated to offer superior abrasion resistance. Please follow below instructions to prolong the life of your lenses and keep them performing at their best:

- Clean lenses with water only.
- Do not use solvents or special cleaners.
- Use micro-fiber cleaning cloth to gently wipe clean.
- Never use paper products to clean and avoid wiping lens surface when dry and/or dirty as this may potentially scratch the lens.

WARNING: Wiley X brand eyewear is tested tough. However, impact resistant eyewear is not unbreakable and does not provide unlimited eye protection under all circumstances and conditions. Misused, abused, scratched and/or damaged eyewear can reduce impact protection (and void your limited warranty). Dirty and/or wet eyewear can impair vision and reduce safety (resulting in personal injury and/or property damage). Keep your Wiley X eyewear clean with water only. Do not use solvents or abrasives as it could scratch or damage the product reducing its effectiveness. Use a micro-fiber cleaning cloth to gently wipe clean. Most of all, take all appropriate precautions when wearing your Wiley X eyewear during hazardous and/or dangerous activities and conditions. Wiley X, Inc. is not responsible for personal injury, property damage or losses incurred while using Wiley X brand products.



WILEY X INC: 1.800.776.7842 925.243.9810 WILEYX.COM
15755 PRESTON RD. FRISCO, TEXAS 75033 USA
WILEY X EMEA LLC: +45 96 93 00 45 WILEYX.EU
SØNDERGADE 8-10 7570 VEMB DENMARK



WILEY X

SIDE SHIELD PLUG STYLE REMOVAL AND ASSEMBLY

COPYRIGHT © 2024 WILEY X, INC. ALL RIGHTS RESERVED.

WILEY X, WX, BLACK OPS, logos, tag lines and product names are trademarks or registered trademarks (marcas registradas) of Wiley X, Inc. in the U.S. and other countries. Logos © 2007-2024 Wiley X, Inc. All rights reserved.